



SVA1000X

Spectrum & Vector Network Analyzer




Features and Benefits

- Spectrum Analyzer Frequency Range from 9 kHz up to 7.5 GHz
- Vector Network Analyzer Frequency Range from 100 kHz up to 7.5 GHz
- -165 dBm/Hz Displayed Average Noise Level (Typ.)
- -98 dBc/Hz.@10 kHz Offset Phase Noise (1 GHz, Typ.)
- Level Measurement Uncertainty < 0.7 dB (Typ.)
- 1 Hz Minimum Resolution Bandwidth (RBW)
- Preamplifier Standard
- Tracking Generator Standard
- Distance To Fault (Opt.)
- Vector Signal Modulation Analysis (Opt.)
- EMI Filter and Quasi-Peak Detector Kit (Opt.)
- Advanced Measurement Kit (Opt.)
- 10.1 Inch Multi-Touch Screen , Mouse and Keyboard supported
- Web Browser Remote Control on PC and Mobile Terminals and File Operation




Design features


• 10.1 Inch Display with Multi-Touch Screen

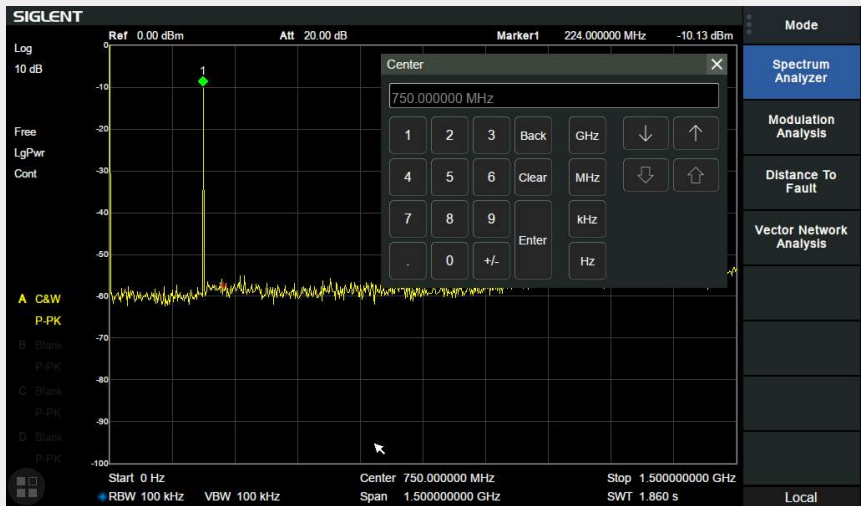

• Phase noise <-98 dBc/Hz@1 GHz, offset 10 kHz

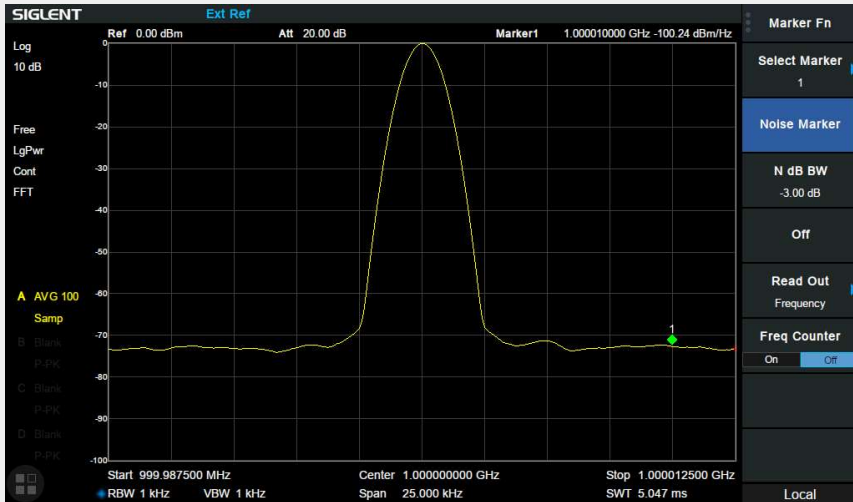


• Minimum 1 Hz Resolution Bandwidth (RBW)

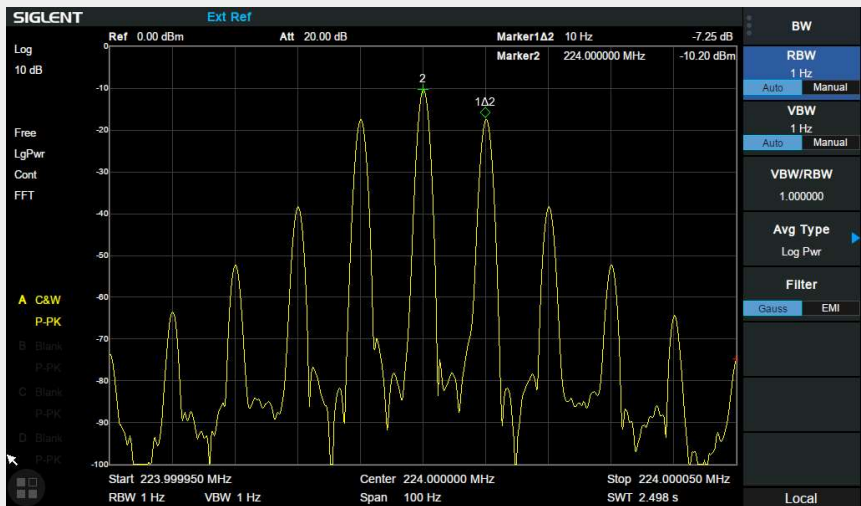


• ACPR in Advanced Measurement Kit




• -165 dBm/Hz Displayed Average Noise Level

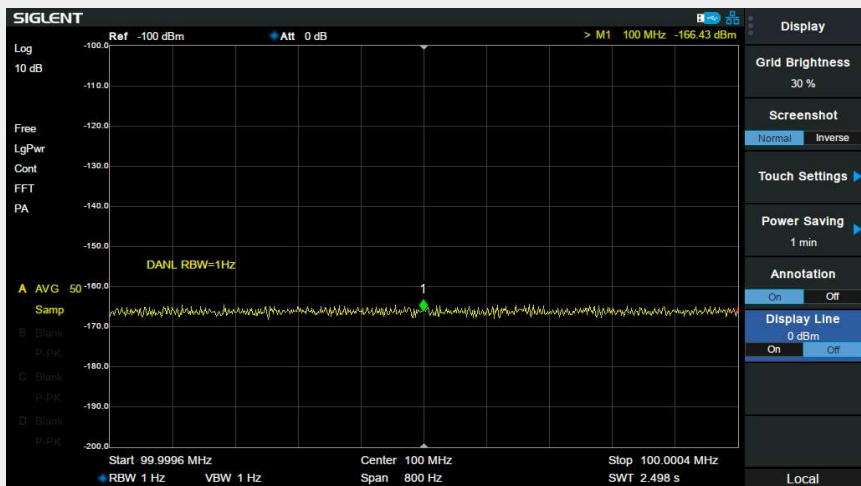

• Monitor in Advanced Measurement Kit

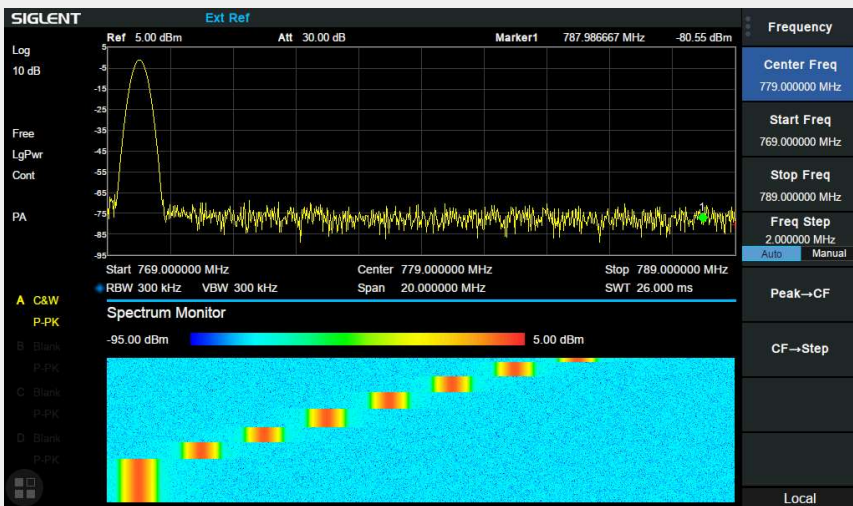

• 100 k-7.5 GHz Vector S11 and S21 measurement, Multi Formats Overlay Display


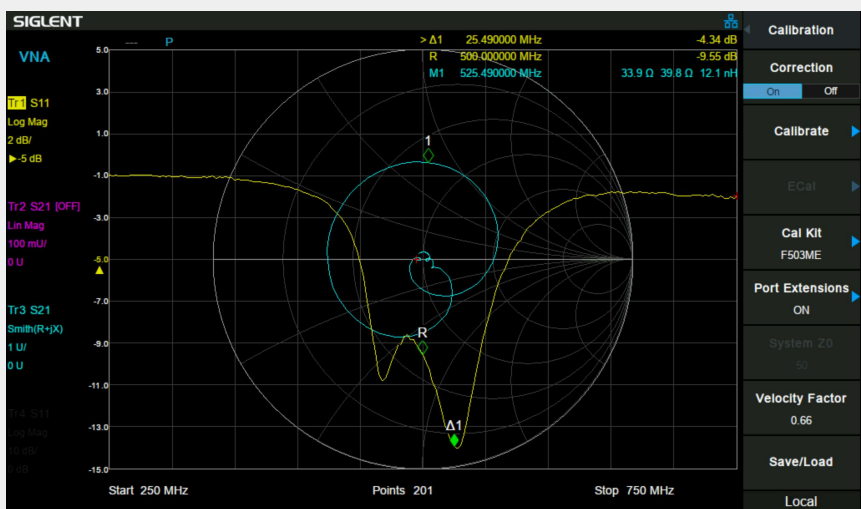


• Cable and Antenna Test based on Timing Domain Analysis





SVA1000X Spectrum & Vector Network Analyzer

- AM/FM,ASK/FSK/PSK/MSK/QAM Vector Signal Modulation Analysis
- CISPR 16-1-1 EMI filter and Quasi-peak Detector , Log scale and limit line

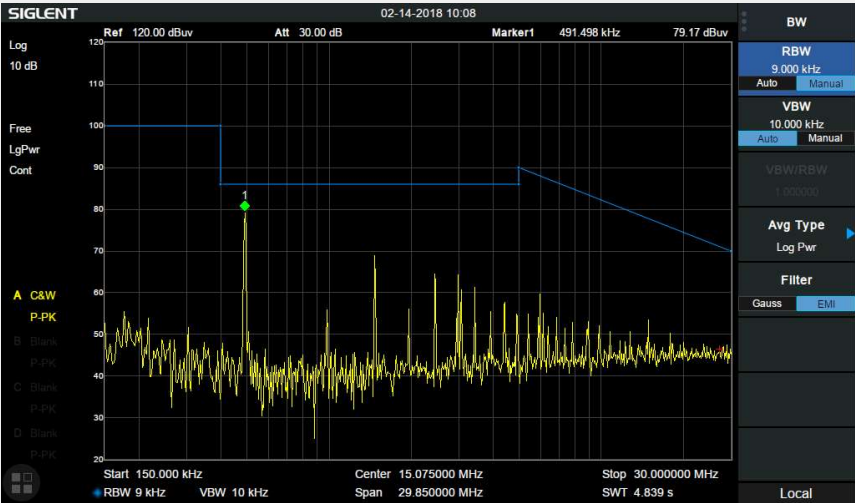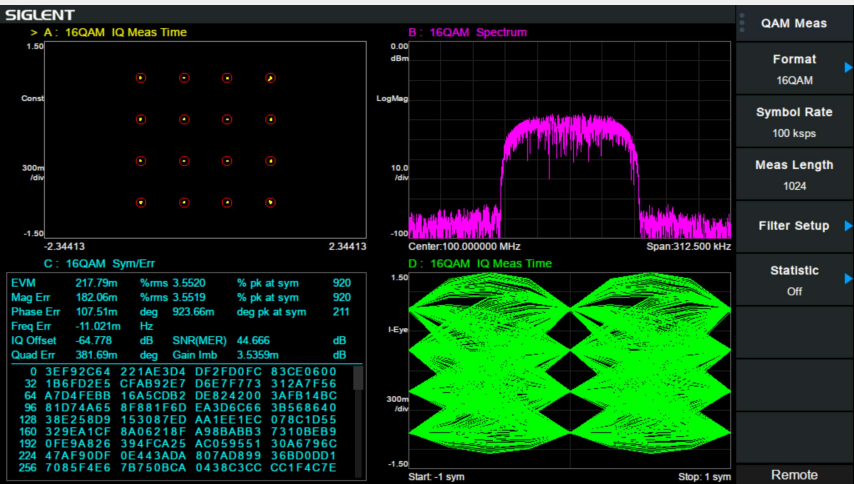

- Easy Spectrum^T Software for Free
- Remote Control on Web Browser

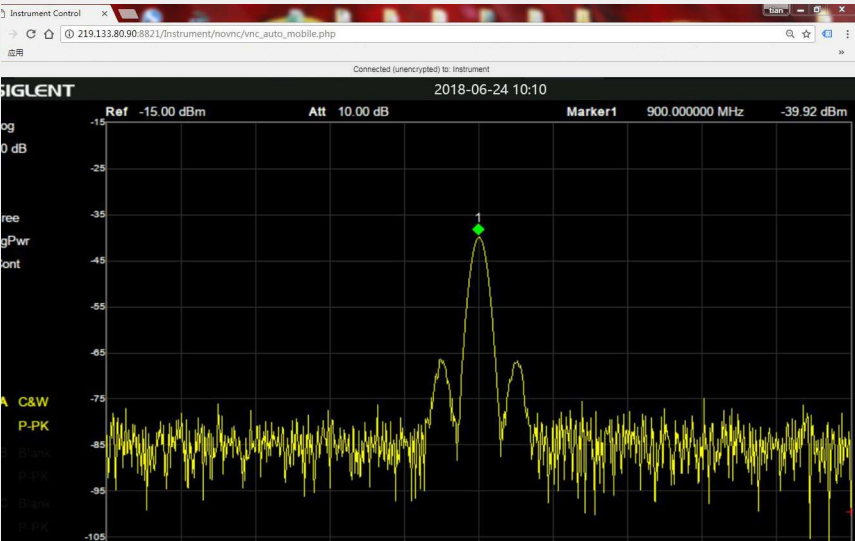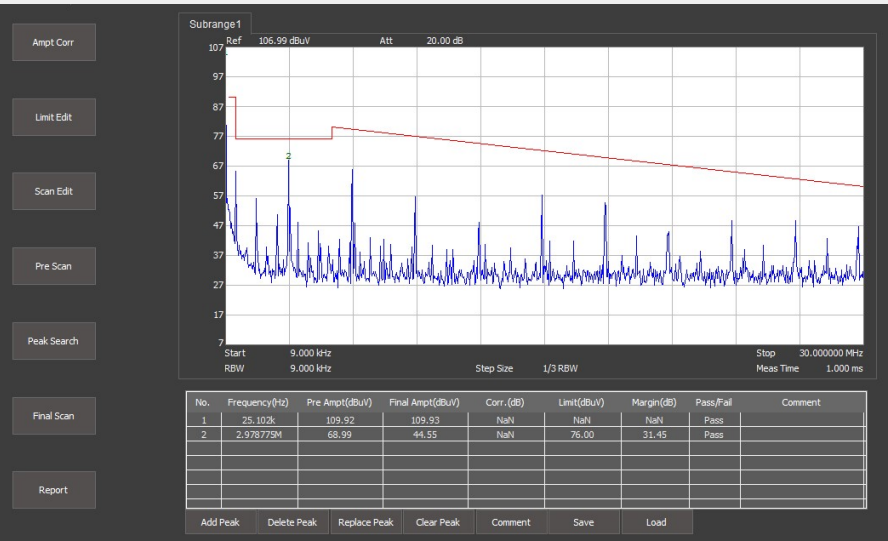

 Model and Main index

Model	SVA1015X	SVA1032X	SVA1075X
Spectrum Analyzer Frequency Range	9 kHz~1.5 GHz	9 kHz~3.2 GHz	9 kHz~7.5 GHz
Vector Network Analyzer Frequency Range	10 MHz~1.5 GHz	100 kHz~3.2 GHz	100 kHz~7.5 GHz
Resolution Bandwidth	1 Hz~1 MHz	1 Hz~1 MHz	1 Hz~3 MHz
Displayed Average Noise Level	-156 dBm/Hz	-161 dBm/Hz	-165 dBm/Hz
SSB Phase Noise	<-99 dBc/Hz	<-98 dBc/Hz	<-98 dBc/Hz
Total Amplitude Accuracy	< 1.2 dB	< 0.7 dB	< 0.7 dB
Tracking Generator	5 MHz~1.5 GHz	100 kHz~3.2 GHz	100 kHz~7.5 GHz
VNA measurement	Vector S11,Vector S21		
Distance to Fault	VNA Timing Domain Analysis Locator		
Touch Screen	Multi Touch, Mouse and Keyboard supported		
Advanced Measurement	CHP, ACPR, OBW, CNR, Harmonic, TOI, Monitor		
Reflection Measurement	VSWR measurement using Reflection Bridge		
EMI Test	EMI Filter and Quasi-Peak Detector, Log Scale and Limit Line		
Modulation Analysis	AM, FM; ASK, FSK, MSK, PSK, QAM		
Communication Interface	LAN, USB Device, USB Host (USB-GPIB)		
Remote Control Capability	SCPI/Labview/IVI based on USB-TMC/VXI-11/Socket/Telnet		
Remote Controller	NI-MAX, Web Browser, Easy Spectrum software, File Explorer		



Ordering Information

Product	Description	Order Number
Product Code	Spectrum & Vector Network Analyzer, 1.5 GHz	SVA1015X
	Spectrum & Vector Network Analyzer, 3.2 GHz	SVA1032X
	Spectrum & Vector Network Analyzer, 7.5 GHz	SVA1075X
Standard Accessories	Quick Start, USB Cable, Power Cord	
Common Options and Accessories	Advanced Measurement Kit	SVA1000X-AMK
	Utility Kit: N(M)-SMA(M) cable (6 GHz), N(M)-N(M) cable (6 GHz), N(M)-BNC(F) adaptor x 2, N(M)-SMA(F) adaptor x 2, 10 dB 1W attenuator	UKitSSA3X
	N(M)-SMA(M) cable, 70cm, 6 GHz	N-SMA-6L
	N(M)-N(M) cable, 70cm, 6 GHz	N-N-6L
	N(M)-BNC(M) cable, 70cm, 2 GHz	N-BNC-2L
	N(M)-N(M) cable, 100cm, 18 GHz	N-N-18L
	N(M)-SMA(M) cable, 100cm, 18 GHz	N-SMA-18L
	USB-GPIB Adaptor	USB-GPIB
	Soft carrying bag	BAG-S2
	6U Rack Mount Kit	SSA-RMK
VNA Options	Distance To Fault	SVA1000X-DTF
	Mechanical Calibration Kit: Open(M), Short(M), Match(M,50), Through(F-F), 4.5 GHz, N-Male connector	F503ME
	Mechanical Calibration Kit: OSLT, DC - 4.5 GHz, N-Female connector	F503FE
	Mechanical Calibration Kit: OSLT, DC - 4.5 GHz, 3.5mm SMA-Male connector	F603ME
	Mechanical Calibration Kit: Open(M), Short(M), Match(M,50), Through(F-F), 4.5 GHz, SMA-Female connector	F603FE
	Mechanical Calibration Kit: OSLT, DC - 9 GHz, N-Male connector	F504MS
	Mechanical Calibration Kit: OSLT, DC - 9 GHz, N-Female connector	F504FS
	Mechanical Calibration Kit: OSLT, DC - 9 GHz, 3.5mm SMA-Male connector	F604MS
	Mechanical Calibration Kit: OSLT, DC - 9 GHz, 3.5mm SMA-Female connector	F604FS
	N-type, Male and Female, 50Ω Calibration Kit, 0-9GHz	F504TS
	3.5 mm, Male and Female, 50Ω Calibration Kit, 0-9GHz	F604TS
EMI test Options	EMI Measurement Kit: EMI Filter and Quasi Peak Detector, EMI Receiver Mode in EasySpectrum Software	SVA1000X-EMI
	300 kHz~3 GHz Near Field Probe Kit: 3 H-probes (20/10/5 mm), 1 E-probe (5 mm)	SRF5030T
Modulation Analysis Options	Digital Modulation: ASK, FSK, MSK, PSK, QAM	SVA1000X-DMA
	Analog Modulation: AM, FM	SVA1000X-AMA